


BCS-P-5623RSAP-II

Network PTZ Dome Camera 2Mpx with zoom 30×

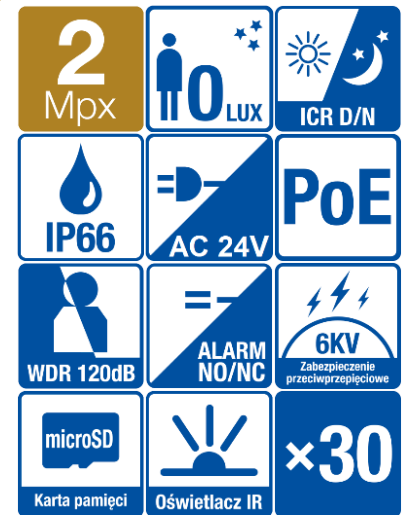


ONVIF®

Key features:

- Sensor 1/2.8" 2 Mpx PS CMOS
- Compression H.265+/H.264+/MJPEG
- Triple stream coding
- IR-cut filter with auto switch (ICR)
- Digital Noise Reduction 2D/3D
- Built-in web-service, support BCS-NVR, CMS(BCS Manager), P2P
- Functions AWB, AGC, BLC, HLC, ROI, EIS, ANR, Defog, WDR(120dB)
- Intelligent functions: cross line, intrusion, face detect, people counting, missing/abandoned object, auto-tracking, audio detect
- IR range up to 150m
- Lens 4.5~135mm with optical zoom 30×
- Outside protection IP66 metal casing
- Edge storage microSD up to 256GB
- Max speed 300°/s, 0°~360° Tilt, -15°~90° Pan auto flip
- Automatic functions: 1024 presets, 16 tours, 16 patrols
- Working environment -40°C ~ +65°C
- Power supply DC24V / AC24V (voltage range ±25%) / PoE
- Surge protection 6KV

Dimensions:

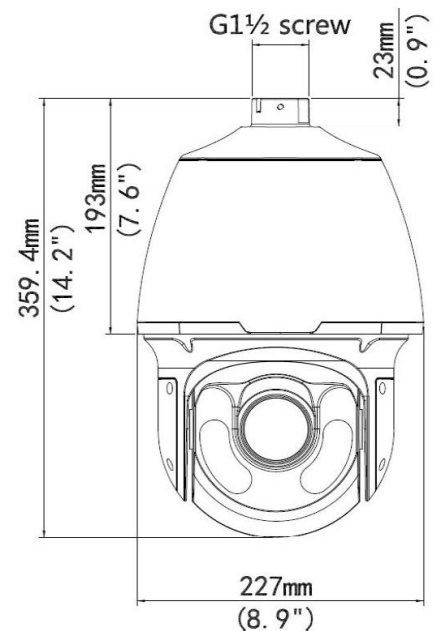

BCS-P-5623RSAP-II

Network PTZ Dome Camera 2Mpx with zoom 30×

Specification:

System video	IP
System scanning	Progressive Scan
Sensor	1/2.8" 2Mpx CMOS
Pixels	1920(H) × 1080(V)
Minimum illumination	0.01Lux/F1.5 (Color, AGC On); 0Lux(B/W, IR On)
S/N ratio	> 52dB
Lens	4.5~135mm F1.5~F4.0; angle of view H: 71.1°~2.4°, V: 43.4°~1.3°; zoom optical 30×
DORI	4.5mm: 69m/27m/14m/7m
(Detect/Observe/Recognize/Identify)	135mm: 2094m/837m/419m/209m
White balance	(AWB) Auto/manual
Backlight compensation	BLC / HLC / WDR(120dB)
Shutter	Auto/manual (1~1/100000s)
Gain control	(AGC) Auto/manual
Noise reduction	2D/3D NR - regulation
Motion detect	4 areas (regulation: size, position, sensitivity, threshold)
Privacy masking	24 areas (regulation: size, position)
Image rotate	Mirror, flip
Focus	Auto/manual
Day/night	IR-cut filter with auto switch (ICR)
IR range	Up to 150m
Zoom digital	16×
Range PAN	0°~360° endless
Range TILT	-15°~90°, auto flip 180°
Speed PAN	0.1°~240°/s (300°/s in preset)
Speed TILT	0.1°~160°/s (240°/s in preset)
Automatic functions	1024 presets, 16 tours(32 presets per tour), 16 patrols
Video compression	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Resolution	1080P(1920×1080) / 720P(1280×720) / D1(704×576) / (640×360) / 2CIF(704×288) / CIF(352×288)
Main stream	1080P/720P@30fps
Second stream	1080P/720P/D1/(640×360)/2CIF/CIF@30fps
Triple stream	D1/(640×360)/2CIF/CIF@30fps
Audio	1 audio in / 1 audio out
Audio compression	G.711A / G.711U
Alarm	1 alarm in / 1 alarm out
Network	RJ-45 (10M/100MBase-TX)
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, P2P
Compatibility	ONVIF(Profile S, Profile G, Profile T), API
Users	Max 10 logged in
Mobile users	iOS, android
Edge storage	microSD up to 256GB
Power supply	DC24V / AC24V (voltage range ±25%) / PoE
Power consumption	9~42W
Working environment	-40°C ~ +65°C
Casing	Metal, outside protection IP66
Weight	5.3kg
Dimensions	Φ227mm×359mm

