


BCS-B-SP1602G-2SFP-II

16 ports switch (16×PoE) 100Mbps + 2×Gigabit(RJ45&SFP) with 4 modes



- 16 ports switch PoE
- 4 modes: QoS, PoE, Extend, VLAN
- Standard IEEE802.3 af/at
- Max power output 30W for single PoE port
- 16 ports PoE 100Mbps
- 2 ports RJ45 uplink Gigabit
- 2 ports fiber SFP Gigabit
- Function MDI/MDIX
- Transmission up to 250m
- Function VLAN
- Metal casing
- Support RACK 1U
- Fan inside casing
- Power supply 100~240V AC

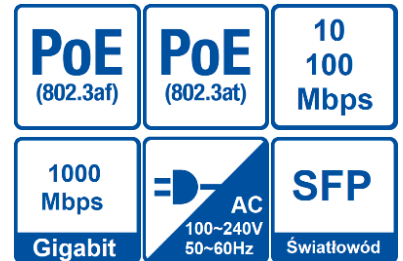

BCS-B-SP1602G-2SFP-II

16 ports switch (16×PoE) 100Mbps + 2×Gigabit(RJ45&SFP) with 4 modes

Portys	16 × RJ45 PoE 100Mbps + 2 × RJ45&SFP Gigabit
Ports Uplink (MDI/MDIX)	2 × RJ45&SFP Gigabit
Transfer	10/100/1000Mbps half-duplex, full duplex, auto-negotiation
Standard	IEEE802.3 af/at
Pocket forwarding	5.36Mpps
Capacity	7.2Gbps
Max power output	30W for single port PoE (total 150W)
Mode AI VLAN	Ports 1-16 isolated from 17-18
Mode AI EXTEND	Ports 1-8 transmission extend to 250m (cat5e, cat6)
Mode AI QOS	Quality Of Service – priority video pockets
Mode AI PoE	Monitoring ports supply PoE devices and automatic restart with power supply cut when not responding
Leds status	PWR(constant red): power supply LINK/ACT(green): device plugged in PoE(yellow): PoE power supply
PoE pin	1,2(+); 3,6(-)
Power	100~240V AC 50/60Hz
Dimensions	440×180×44mm
Weight	2.2kg
Working environment	0°~40°C, 10%~90%RH

